



AW Lock Washers

AW lock washers are designed to provide safety and stability in assemblies that use AN and KM locknuts.

Manufactured with metric dimensions, they feature:

- External teeth with a 25° inclination.
- An internal tab bent on the opposite side of the external teeth.

CÓDIGO	d	Ds	D	S	E	F	M	S2	H
AW 2	15	28	21	1.06	4	13.5	4	2.5	R1.0
AW 3	17	32	24	1.06	4	15.5	4	2.5	R1.0
AW 4	20	36	26	1.06	4	18.5	4	2.5	R1.0
AW 5	25	42	32	1.2	5	23	5	2.5	R1.0
AW 6	30	49	38	1.2	5	27.5	5	2.5	R1.0
AW 7	35	57	44	1.2	6	32.5	5	2.5	R1.0
AW 8	40	62	50	1.2	6	37.5	6	2.5	R1.0
AW 9	45	69	56	1.2	6	42.5	6	2.5	R1.0
AW 10	50	74	61	1.2	6	47.5	6	2.5	R1.0
AW 11	55	81	67	1.2	8	52.8	7	4	R1.0
AW 12	60	86	73	1.5	8	57.5	7	4	R1.2
AW 13	65	92	79	1.5	8	62.5	7	4	R1.2
AW 14	70	98	85	1.5	8	66.5	8	4	R1.2
AW 15	75	104	90	1.5	8	71.5	8	4	R1.2
AW 16	80	112	95	1.9	10	76.5	8	4	R1.2
AW 17	85	119	102	1.8	10	81.5	8	4	R1.2
AW 18	90	126	108	1.9	10	86.5	10	4	R1.2
AW 19	95	133	113	1.9	10	91.5	10	4	R1.2
AW 20	100	142	120	1.9	12	96.5	10	6	R1.2
AW 22	110	154	133	1.9	12	105.5	12	6	R1.2
AW 23	115	159	137	1.9	12	110.5	12	6	R1.5
AW 24	120	164	138	1.9	14	115	12	6	R1.5
AW 26	130	175	149	1.9	14	125	12	6	R1.5
AW 28	140	192	160	1.9	16	135	14	8	R1.5
AW 29	145	202	171	1.9	16	140	14	8	R1.5
AW 30	150	202	171	1.9	16	145	14	8	R1.5
AW 32	160	217	182	2.65	18	154	16	8	R1.5
AW 34	170	232	193	2.65	18	164	16	8	R1.5
AW 36	180	242	203	2.65	20	174	18	8	R1.5
AW 38	190	252	214	2.65	20	184	18	8	R1.5
AW 40	200	262	226	2.65	20	194	18	8	R1.5
AW 44	220	292	250	3	24	213	20	10	R2.0

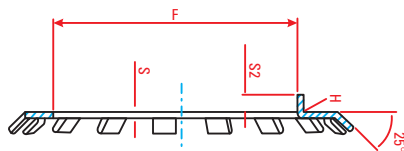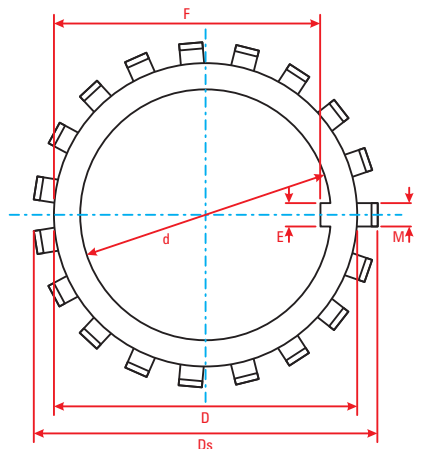

Since 1957

+55 19 3451.8210 • +55 19 99155.1332
 info@bgl.com.br • www.bgl.com.br/en

